

Item Number
RAM-VB-178

RAM No-Drill™ Seat Bases

National Products, Inc.

**Vehicle base for the
DODGE RAM 4500 (2008-NEWER)
DODGE RAM 5500 (2008-NEWER)**

SPECIFICATIONS

Placement

Passenger side on the floor, at front of seat

Drilling Required

No - uses existing seat bolts

Seat Configuration

Bucket

Construction/Finish

Steel/Black Powdercoat

Dimensions

A = 14.75", B = 3.8", C = 1.75"

Hole Center = 13.25"

Pole or Pedestal

Sold Separately

Weight

2.1 lbs.

Features

Installs in minutes with no drilling required
Low profile keeps mount away from passenger leg space
Won't interfere with levers or factory-installed console or 4WD lever


Misc.

Designed to accommodate trucks with PTO
Rock solid construction
Lifetime warranty

National Products, Inc.
Phone: 206-763-8361
Fax: 206-763-9615
Address: 1205 S Orr St
Seattle, WA 98108
Website: www.ram-mount.com
Email: staff@ram-mount.com



Shown In Use

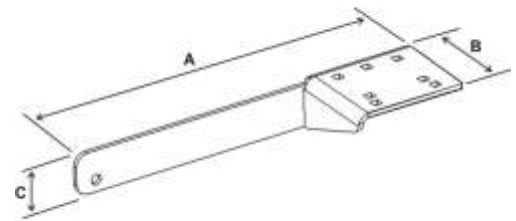

RAM-VB-178



Item Number
RAM-VB-178

RAM No-Drill™ Seat Bases

National Products, Inc.

Vehicle base for the
DODGE RAM 4500 (2008-NEWER)
DODGE RAM 5500 (2008-NEWER)

INSTALLATION INSTRUCTIONS

1. Move the passenger seat back to its rearmost position and remove the two front seat rail bolts on the passenger side. These pass through the seat frame legs into the floor board. A 15MM socket works best.
2. Without moving the seat, place the No-Drill™ base over the front of the seat frame legs.
3. Align the holes in the base with those of the seat frame legs. The pedestal platform should be near the console.
4. Re-install the seat bolts and fully tighten.

National Products, Inc.
Phone: 206-763-8361
Fax: 206-763-9615
Address: 1205 S Orr St
Seattle, WA 98108
Website: www.ram-mount.com
Email: staff@ram-mount.com

